



17in. LCD Console support USB and PS2 CL1000M

ATEN's new economy LCD KVM console, CL1000M, offers a space-saving, streamlined approach to IT environments by integrating a keyboard, 17" LCD monitor, and touchpad in a 1U Slideaway™ housing. The LCD display is built into the cover; the keyboard and touchpad are built into the base. Setup is fast and easy. There is no software to configure, no installation routines, and no incompatibility problems. Slide the console module section out; flip the cover up; and you are ready to go to work. When finished, flip the cover down and slide the console module away back into the rack. For added versatility the CL1000M comes with a USB and PS/2 cable to simplify connecting to your KVM.

There is no better way to save time and money than with a CL1000M installation. By using the CL1000M to manage your installation, you:


- Save all the space those standard components, keyboard, mouse, and monitor, would take up
- Eliminate the expense of having to purchase a separate keyboard, monitor, and mouse for each computer if attaching to a KVM switch
- Take advantage of upgrading your current system, since CL1000M is compatible with all types of KVM switches
- Save time for installation. Just connect the cable between CL1000M and a KVM or a computer, and the CL 1000M is ready to serve you.

Distributor Part NO. : Contact Aten for part number @ 949.428.1111

Features:

- Integrated KVM console featuring a 17" LCD monitor in a 1U height.
- Compatible with all ATEN KVM Switches and most of KVM switch in the market
- Built in internal power 1280 x 1024 resolution assures crisp video display
- Less than 1 U high mountable rack
- Adjustable depth to fit within the different racks

Diagram :

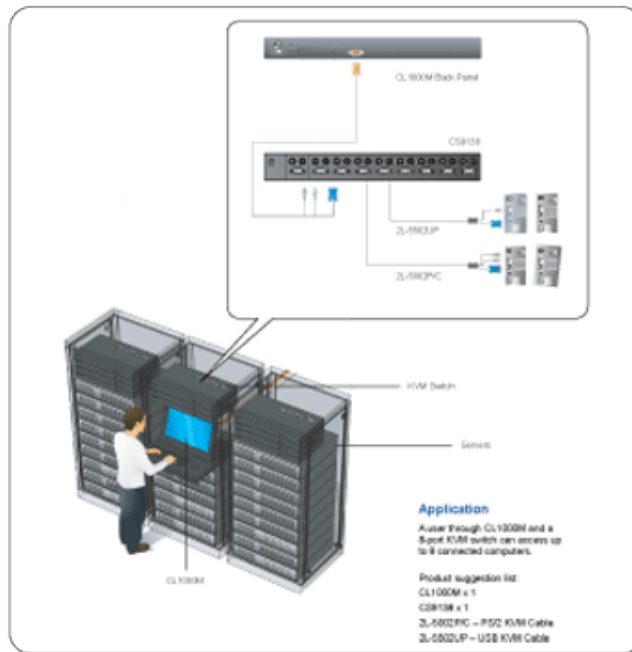

Requirements:

PS/2 or USB type KVM, or computers with PS/2 or USB connections

Package Content:

- 1 x CL-1000 Slideaway™ Console Module with Standard Rack Mounting Kit
- 1 x Custom KVM PS/2 Cable (2L5202P, 6 ft. PS2)
- 1 x Custom KVM USB Cable (USB)
- 1 x Power Cord
- 1 x User Manual
- 1 x Quick Start Guide

Specification :

Power Consumption	120V 60Hz 22.8W / 230V 50Hz 24W
Emulation	
Keyboard	PS/2
Mouse	PS/2
Computer Connections	
Direct	1
CPU Connectors	
Keyboard, Mouse, and Monitor	1 x SPHD-15 Female
Connectors	
Power	3 prong AC Socket

Environment	
Operation Temperature	32F~122F (0C~50C)
Storage Temperature	-4F~140F (-20C~60C)
Humidity	0~80% RH
Warranty	1-Year
Physical Properties	
Housing	Metal
Unit Weight	30.0 lb
Unit Weight with package	42.0 lb.
Unit Package Dimensions	28.3 x 26.8 x 5.6 in.
Unit Dimension	23.6 x 18.9 x 1.8 in.