

CRESCENT - DI-16

COST EFFECTIVE 16X1 HDMI MULTIVIEWER

Key Features

- Low latency - single frame processing delay
- Low Energy - only uses 20 W of power
- Accepts 16 HDMI inputs
- Windows can be sized and moved freely
- Decode up to 4 embedded audio per HDMI input
- Total of 64 audio meters
- 2 simultaneous and identical HDMI and SDI outputs
- Ethernet for configuration and external control
- Dynamic UMD/labels & Tallies (TSL)
- Stand alone labels, customizable logos
- 32 GPIs for tallies, count up/down triggers or alarms
- 2 digital and 2 analog clocks can be sync'd with LTC or NTP
- Borders can be turned on or off
- Safe area markers
- Visual Alarm tags for video/audio alarm detection
- Audio monitoring output - Stereo, AES, Embedded SDI and HDMI
- Optional redundant power supply
- 3 year limited warranty



Accessories

Standard


- Rack mount
- 16 x Type D to A HDMI cables
- 4 x RJ50 to DB9 for GPI
- 4 x breakout terminal blocks
- RJ45 to DB9 for serial
- CD (software, manual)

Options


- Redundant power supply



RJ45-DB9: GPI Adapter




RJ45-DB9: RS232 Adapter



DB9 GPI Breakout



HDMI Type D to A Cable

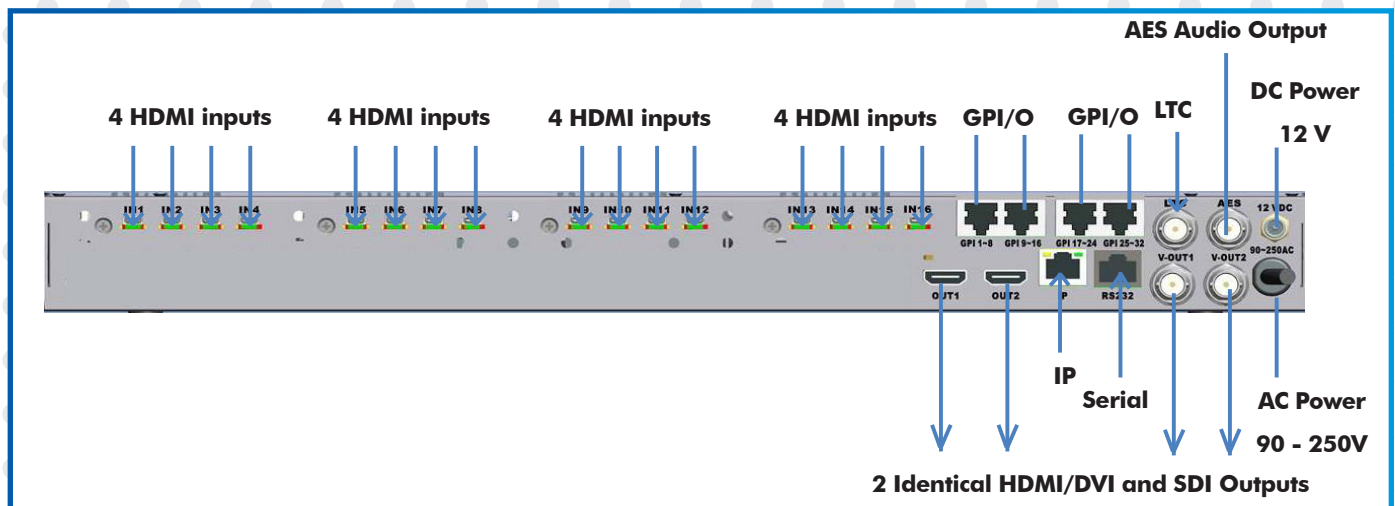

CRESCENT - DI-16+ (PLUS) COST EFFECTIVE DUAL OUTPUT (8+8) HDMI MULTIVIEWER

Key Features

- Low latency - single frame processing delay
- Low Energy - only uses 20 W of power
- Accepts 16 HDMI inputs
- Windows can be sized and moved freely
- Decode up to 4 embedded audio per HDMI input
- Total of 64 audio meters (32 meters per output)
- 2 separate independent outputs with 8 inputs each
- Simultaneous HDMI and SDI outputs
- Ethernet for configuration and external control
- Dynamic UMD/labels & Tallies (TSL)
- Stand alone labels, customizable logos
- 32 GPIs for tallies, count up/down triggers or alarms
- 2 digital and 2 analog clocks can be sync'd with LTC or NTP
- Borders can be turned on or off
- Safe area markers
- Visual Alarm tags for video/audio alarm detection
- Stereo analog audio monitoring output
- Optional redundant power supply
- 3 year limited warranty




Accessories

Standard

- Rack mount
- 16 x Type D to A HDMI cables
- 4 x RJ50 to DB9 for GPI
- 4 x breakout terminal blocks
- RJ45 to DB9 for serial
- CD (software, manual)

Options


- Redundant power supply



RJ50-DB9: GPI Adapter




RJ45-DB9: RS232 Adapter

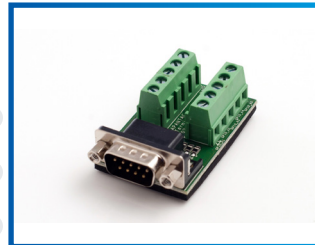

DB9 GPI Breakout



HDMI Type D to A Cable

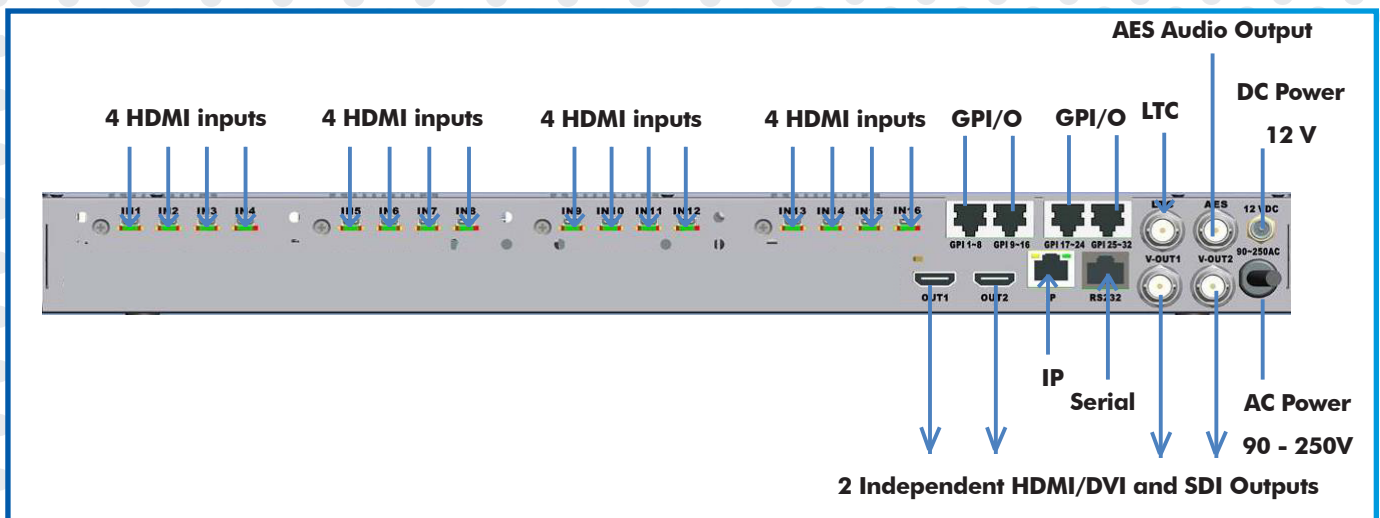

CRESCENT - DI-16# (SHARP) COST EFFECTIVE DUAL OUTPUT (16X2) HDMI MULTIVIEWER

Key Features

- Low latency - single frame processing delay
- Low Energy - only uses 20 W of power
- Accepts 16 HDMI inputs
- Every input can be duplicated up to 16 times
- Every input is available to both outputs
- Decode up to 4 embedded audio per HDMI input
- Total of 64 audio meters (32 meters per output)
- 2 independent outputs of HDMI and SDI
- Ethernet for configuration and external control
- Dynamic UMD/labels & Tallies (TSL)
- Stand alone labels, customizable logos
- 32 GPIs for tallies, count up/down triggers or alarms
- Built-in digital clocks can sync with LTC or NTP
- Borders can be turned on or off
- Safe area markers
- Visual Alarm tags for video/audio alarm detection
- Stereo analog audio monitoring output
- Optional redundant power supply
- 3 year limited warranty



Accessories

Standard

- Rack mount
- 16 x Type D to A HDMI cables
- 4 x RJ50 to DB9 for GPI
- 4 x breakout terminal blocks
- RJ45 to DB9 for serial
- Analog audio breakout cable
- CD (software, manual)


Options



RJ50-DB9: GPI Adapter




RJ45-DB9: RS232 Adapter



DB9 GPI Breakout



HDMI Type D to A Cable

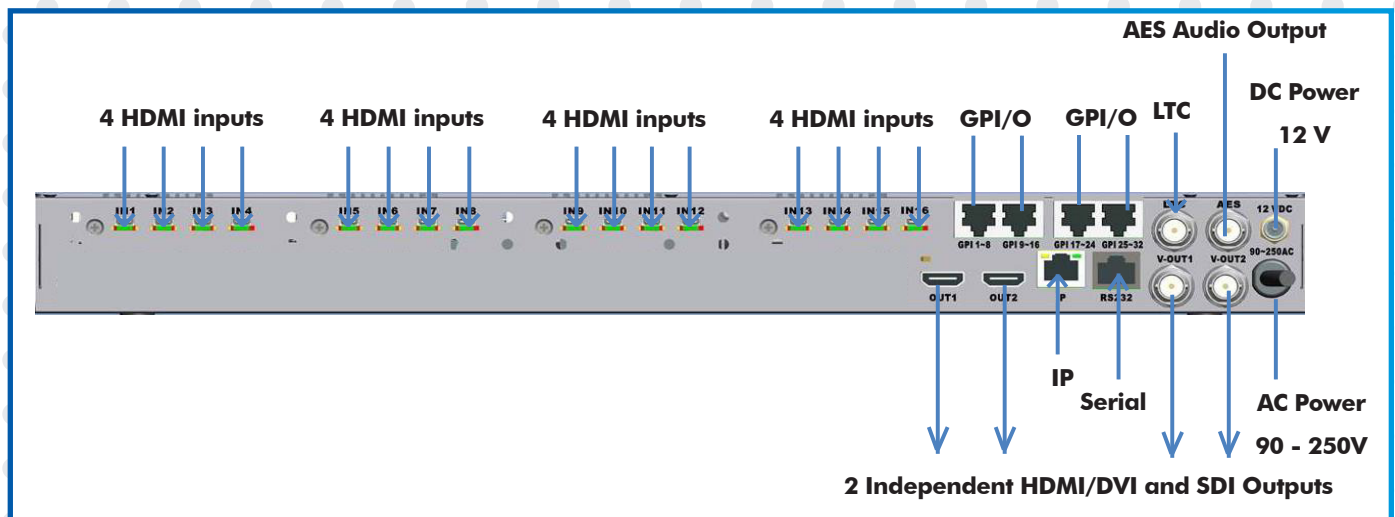

Di-16 SPECIFICATIONS			
Inputs	16 HDMI	Video Outputs	2 identical DVI/HDMI, SDI
Loop outs	N/A	Audio Outputs	AES and Analog audio monitor outputs
Connectors	HDMI Type-D Female	Output Resolution	1920 x 1080p 50/60Hz
Total Windows	16	On Screen Display	Borders, labels, tally UMD, OMD, IMD, dynamic UMD
Supported Resolutions	480P, 720P, 1080i, 1080P 50/60Hz	General Purpose IO	Up to 32 inputs with RJ50 - DB9 connectors
		Serial Port	Connector: RJ45, Baud Rate up to 115200 Format, TSL, TSI, AXP
		IP	100 Base-Tx, TSL, AXP Connector: RJ45
Embedded Audio	4 channels	Electrical	50W, 90-250V 50/60 Hz
Alarms	No audio, audio high/low, no video	EMI/RFI	Complies with FCC Part 15 Class A, CE, EU EMC, C-tick
Power	90-250 AC / 12 DC	Size	1 RU, 25 cm (10")

Di-16+ SPECIFICATIONS			
Inputs	16 HDMI	Video Outputs	2 independent DVI/HDMI, SDI outputs
Loop outs	N/A	Audio Outputs	AES and Analog audio monitor outputs
Connectors	HDMI Type-D Female	Output Resolution	1920 x 1080p 50/60Hz
Total Windows	16	On Screen Display	Borders, labels, tally UMD, OMD, IMD, dynamic UMD
Supported Resolutions	480P, 720P, 1080i, 1080P 50/60Hz	General Purpose IO	Up to 32 inputs with RJ50 - DB9 connectors
		Serial Port	Connector: RJ45, Baud Rate up to 115200 Format, TSL, TSI, AXP
		IP	100 Base-Tx, TSL, AXP Connector: RJ45
Embedded Audio	4 channels per input	Electrical	50W, 90-250V 50/60 Hz
Alarms	No audio, audio high/low, no video	EMI/RFI	Complies with FCC Part 15 Class A, CE, EU EMC, C-tick
Power	90-250 AC / 12 DC	Size	1 RU, 25 cm (10")

Di-16# SPECIFICATIONS			
Inputs	16 HDMI	Video Outputs	2 independent DVI/HDMI, SDI outputs
Loop outs	N/A	Audio Outputs	AES and Analog audio monitor outputs
Connectors	HDMI Type-D Female	Output Resolution	1920 x 1080p 50/60Hz
Total Windows	32+	On Screen Display	Borders, labels, tally UMD, OMD, IMD, dynamic UMD
Supported Resolutions	480P, 720P, 1080i, 1080P 50/60Hz	General Purpose IO	Up to 32 inputs with RJ50 - DB9 connectors
		Serial Port	Connector: RJ45, Baud Rate up to 115200 Format, TSL, TSI, AXP
		IP	100 Base-Tx, TSL, AXP Connector: RJ45
Embedded Audio	4 channels per input	Electrical	50W, 90-250V 50/60 Hz
Alarms	No audio, audio high/low, no video	EMI/RFI	Complies with FCC Part 15 Class A, CE, EU EMC, C-tick
Power	90-250 AC / 12 DC	Size	1 RU, 25 cm (10")