

Rack Mount 1-Local / 2-Remote Access Cat5 KVM over IP Switch

(HT1208 / HT1216 / HT1232)




Overview

The HT12xx rack mount KVM over IP Switch is a control unit that allows secure access to 8/16/32 computers from a single KVM console.

The HT12xx IP KVM features IP-based connectivity that allows 1 local and 2 remote operators to monitor and access the computers. With TCP/IP communications protocol, the HT12xx IP KVM can be accessed from any computer on the LAN, WAN or Internet.

It's easy to set up the HT12xx IP KVM, just plug the cable into the appropriate port, no software needed, no complicated installation procedures, and no compatibility issues. Connect computers with compact RJ-45 connectors and Cat 5e/6 cable, transmitting distance is up to 100m.

Structure

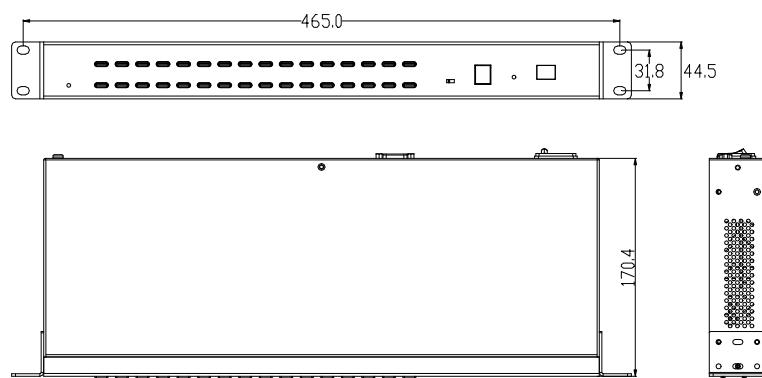

Features

Hardware Features

- Rack-mountable in 1U system rack
- Dual power supply


Local Console

- Control up to 8 / 16 / 32 computers
- Support 1 local user and 2 remote users, port share mode allows local and remote users to gain access to a server simultaneously
- Easy-to-use switching by browser-based UI interface, hotkeys and pushbuttons
- Support servers with VGA/DVI/HDMI port
- Multiplatform client support (Windows, Linux, Unix, Mac, Solaris (Sun), Redhat, Ubuntu)
- Local Console, Browser, and AP GUIs offer a unified Multilanguage interface
- Support mouse synchronization mode-automatically synchronizes the local and remote mouse movements
- Video synchronization with local console - EDID information for local console display can be stored in the host module for video resolution optimization
- Keyboard and mouse emulation to ensure the normal booting
- Auto scan feature for monitoring user-selected computer
- Hot pluggable--add or remove computers without having to power down the switch

Remote Console


- Adaptive 10 / 100 / 1000 Mbps network
- WEB browser-based remote management
- BIOS-level access
- Video quality and video tolerance can be adjusted to optimize data transfer speed, data transfer speed is up to 30 FPS
- Full screen or scalable video display
- Remote users and local users can control the same server/computer synchronously
- Support AES / DES / 3DES encryption
- Support audit function-allows the administrator to audit the device through the system log and operation log
- Exit Macros support
- Configurable user and group permissions for server access and control
- Message Board for communication among remote users
- Support strong password
- Support firmware upgrade

Connector

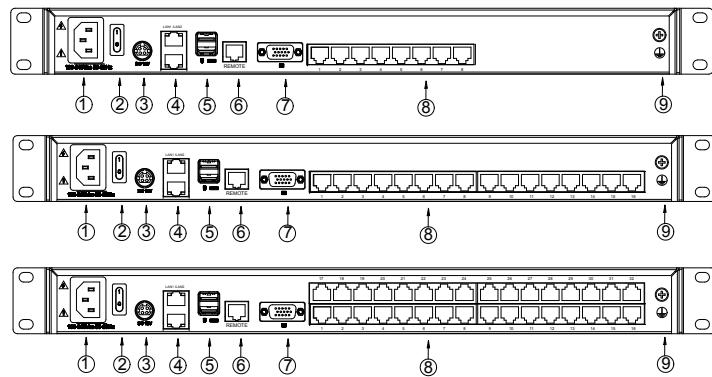

1 Power input (AC)	6 Remote Port
2 Power switch	7 Console Monitor Port
3 Power input (DC)	8 KVM Port
4 LAN port	9 Ground Connection Screw
5 USB Port	

Connection Diagram

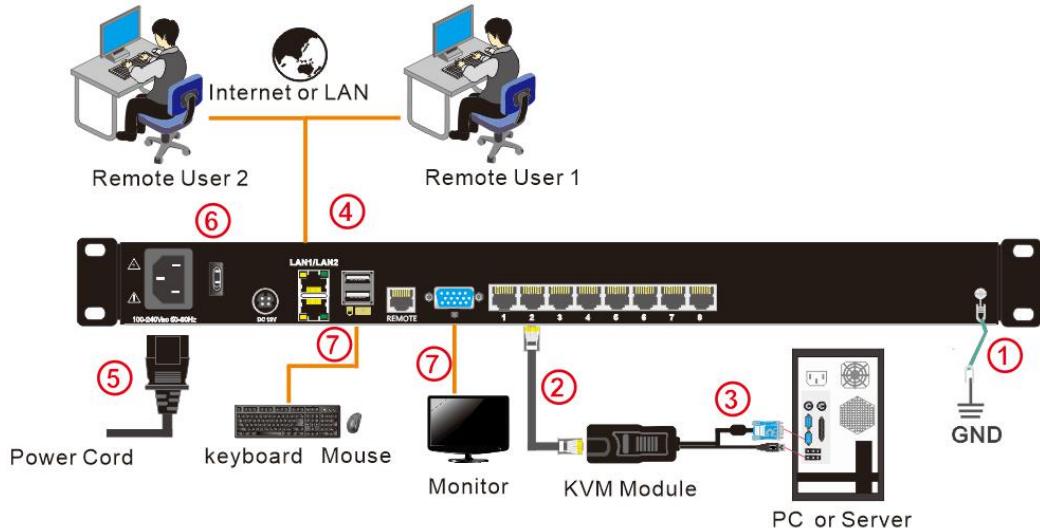

Package Contents

- 1x KVM over IP Switch
- 2x Mounting Rails
- 1x Shield Network Cable
- 1x Power Cord
- 1x Ground Wire
- 1x Quick Start Guide
- 1x User Manual
- USB KVM Dongle (Optional)

Specifications

Model	HT1208	HT1216	HT1232
Computer Connection	8	16	32
Port selection	8	16	32
Port selection	Pushbutton, UI, Web, Hotkey		
Connector	Console	Keyboard Mouse	2x USB TYPE A
		Monitor	1-HDB-15 Female(blue)
	KVM Port (RJ-45)		8 16 32
	Upgrading switch		1x RJ11 Female
Switch	Power		3-Prong AC socket
	Port Selection		8 16 32
	Reset		1x touch-button
	Upgrading switch		1x toggle switch
LEDs	Power		1x rocker switch
	Online (Green)		8 16 32
	Selected (Orange)		8 16 32
	Power		1(blue)
Cascade display		2x 7- Segment (orange)	
Remote	Remote control		KVM control (ActiveX control)
	Management way		Web
	Security		DES encryption
	Resolution		1920×1080@60Hz
I/R Value		100V-240Vac, 50-60Hz, <1.5A	
Power Consumption		17W	18W
Environment Requirements	Operating Temperature		0 — 50 °C
	Store Temperature		-20— 60 °C
	Humidity		0—80%RH, Non-condensing
Physical Features	Material		Metal
	Weight		3kg 3kg 3.2kg
	Dimension		433x171x44.5mm