



### N117 / 119 Single Console



#### Drawer Features & Display Benefits



- ▶ 1U 17" or 19" LCD console drawer
- ▶ Support Windows 7 / Vista / XP / Linux / Mac OS X
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Short depth design of 460mm and 500mm respectively
- ▶ Enhanced aesthetics with molded front handle and two point lock

#### Options

- DVI-D, S-Video + Composite ( BNC ) & Audio input
- 48V, 24V or 12VDC input

#### Specifications

##### • LCD Panel

Manufacturer :		
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	CCFL	CCFL
Colors :	16.7 M	16.7M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	160° x 160°	160° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	50,000	50,000
Signal input :	VGA	VGA

##### • Casing Color :

Black ( RAL 9005 )

##### • Weight ( Single console )

Net :	10.5 kgs ( 23 lbs )	12.5 kgs ( 28 lbs )
Gross :	16.5 kgs ( 36 lbs )	18.5 kgs ( 41 lbs )

##### • Environmental

Operating :	0 to 50°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration ( 11 ms duration )
Vibration :	5~500Hz 1G RMS random vibration

##### • Regulatory :

cUL, FCC, CE

##### • Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

##### • Product Dimensions ( Single console )

N117 :	442 x 460 x 44 mm / 17.4 x 18.1 x 1.75 inch
N119 :	442 x 500 x 44 mm / 17.4 x 19.7 x 1.75 inch

##### • Packing Dimensions ( Single console )

N117 :	590 x 687 x 120 mm / 23.2 x 27 x 4.7 inch
N119 :	590 x 687 x 120 mm / 23.2 x 27 x 4.7 inch



#### Console Cable

##### CE-6


- 6 feet Combo KVM cable ( bundle )
- VGA + USB or PS/2, server end
- DB15 ( VGA, USB KB & MS ), console port

#### Keyboard



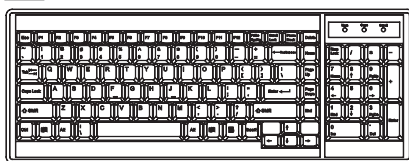



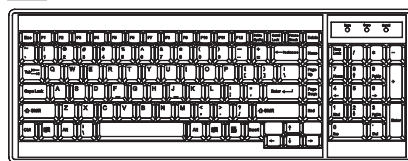








**Ge** G keyboard integrated with touchpad



**Gb** G keyboard integrated with trackball



#### Supporting layouts

America		United States			
EMEA					
	United Kingdom	Germany	France	Spain	Norway
					
	Italy	Russia	Switzerland	Netherlands	Portugal
	Asia				
	China	Japan	Korea	Arabia	Turkey



• **Product Dimensions ( with KVM )**

N117 : 442 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch

N119 : 442 x 620 x 44 mm / 17.4 x 24.4 x 1.73 inch

• **Weight ( Net / Gross )**

N117 : 10.5 kgs ( 23 lbs ) / 16.5 kgs ( 36 lbs )

N119 : 12.5 kgs ( 28 lbs ) / 18.5 kgs ( 41 lbs )

• **Packing Dimensions ( with KVM )**

N117 : 590 x 860 x 120 mm / 23.2 x 33.9 x 4.7 inch

N119 : 590 x 860 x 120 mm / 23.2 x 33.9 x 4.7 inch

• **Casing Color :** Black ( RAL 9005 )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf)

**X** stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	N11X - MUIP1613	N11X - MUIP3213
	1	1	2	-	N11X - MUIP1624	N11X - MUIP3224
	1	1	0	-	N11X - MUIP1602	N11X - MUIP3202
	1	2	0	-	N11X - MUIP1603	N11X - MUIP3203
	1	3	0	-	N11X - MUIP1604	N11X - MUIP3204

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf)

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	N11X - UIP802	N11X - UIP1602	N11X - UIP3202
	1	1	0	N11X - U802	N11X - U1602	N11X - U3202
	1	0	0	N11X - U801	N11X - U1601	N11X - U3201

Cat6 KVM Dongle : DG-100S ( VGA-USB ) / DG-100 ( VGA-PS/2 ) / DG-100SD ( DVI-USB )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	N11X - MIP813	N11X - MIP1613	-
	1	1	2	N11X - MIP824	N11X - MIP1624	-
	1	1	0	N11X - MIP802	N11X - MIP1602	-
	1	2	0	N11X - MIP803	N11X - MIP1603	-
	1	3	0	N11X - MIP804	N11X - MIP1604	-

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	N11X - IP802	N11X - IP1602	-
	1	1	0	N11X - 802	N11X - 1602	-
	1	0	0	N11X - S801	N11X - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 ( 6, 10 or 15 ft )

[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf)

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	N11X - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 ( 6 or 15 ft )