


CS62A

2-Port PS/2 KVM Switch

- CS62A 2-Port KVM Switch has a handy design integrating with 4 feet of cables. It can control 2 servers via a single console.

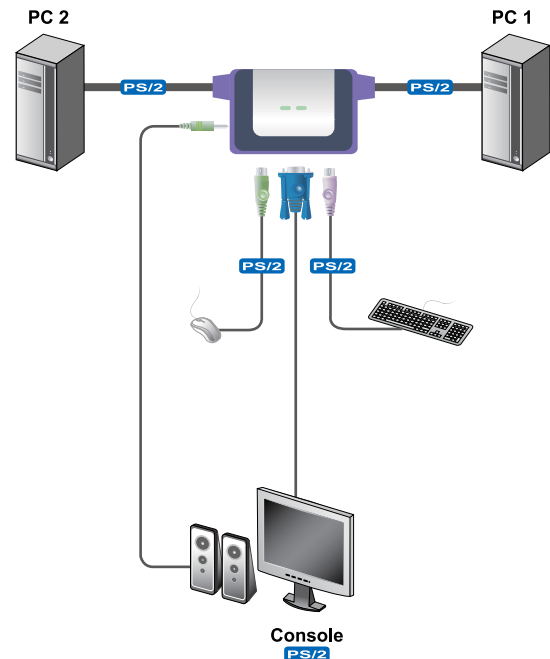

Supports computers that are equipped with speakers

Specification

Function			CS62A
Computer Connections			2
Port Selection			Hotkey
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
		Speaker	1 x Mini Stereo Jack Female (Green)
	KVM Ports	Keyboard	2 x 6 Pin Mini-DIN Male (Purple)
		Video	2 x HDB-15 Male (Blue)
		Mouse	2 x 6-pin Mini-DIN Male (Green)
		Speaker	2 x Mini Stereo Plug Male (Green)
LEDs	Selected	2 (Green)	
Cable Length	Computers	1.2m	
Emulation	Keyboard/ Mouse	PS/2	
Video			2048 x 1536; DDC2B
Scan Interval			3, 5, 10, 20 Seconds
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Plastic
	Weight		0.41 kg
	Dimensions (L x W x H)		8.40x5.40x3.00cm

* The specifications and pictures are subject to change without notice.

Features

- One PS/2 console controls two PS/2 computers
- Compact design, built-in 1.2 m cables
- All-in-one design
- With speaker support
- Superior video quality – up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 05/2014 V4.0



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.