

VS481A

4-Port HDMI Switch

● Expand Your Home Theater System!

The VS481A 4-Port HDMI Switch allows you to quickly and easily connect 4 HDMI input sources to your HDMI display device. The VS481A allows convenient switching between digital devices such as DVD players, satellite receivers and digital camcorders. You can select the desired input source via a remote control unit or pushbuttons located on the front of the switch.



Includes
Remote Control





Maintains High-Definition
Resolution up to 1080p!



Features

- Allows up to four HDMI A/V sources to be connected to one HDMI display
- Toggle between A/V sources using remote control or front panel pushbuttons
- Superior video quality – HDTV resolutions of 480p, 720p, 1080i, 1080p (1920x1080); VGA, SVGA, SXGA, UXGA (1600x1200) and WUXGA (1920x1200)
- HDMI (3D, Deep Color)
- Supports Dolby True HD and DTS HD Master Audio
- Up to 60 Hz refresh rate
- Long distance transmission – up to 20 m (24 AWG)
- Built-in bi-directional RS-232 serial remote port for high-end system control
- Power On Detection - if one of the HDMI source devices is powered off, the VS481A will automatically switch to the next powered on device
- Plug-and-play – no software installation required
- DDC Compatible
- HDMI and HDCP 1.1 compatible
- Signaling rates up to 2.25 Gbits in support of 1080p display
- All-metal casing
- LED indication of video source devices
- Easy and affordable way to add four HDMI inputs to your home theater system

* **Note:** The VS481A AP and GUI operation instructions can be downloaded from the ATEN website (www.aten.com)

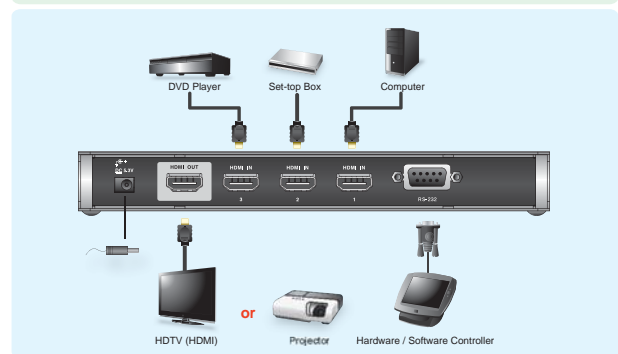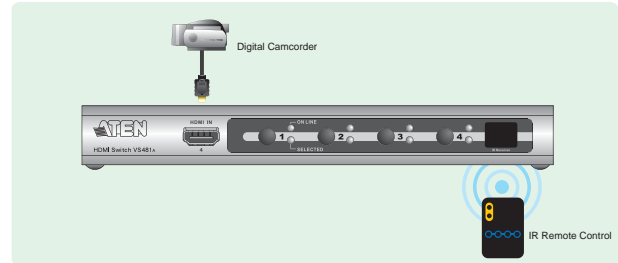

Specification

Function		VS481A
Display Connections		1
Connectors	Device	HDMI In 4 x HDMI Type A Female (Black)
	Display	HDMI Out 1 x HDMI Type A Female (Black)
	RS-232 Port	1 x DB-9 Female (Black)
	Power	1 x DC Jack
LEDs	On Line	4 (Orange)
	Selected	4 (Green)
Video		HDTV resolutions of 480p, 720p, 1080i, 1080p (1920x1080); VGA, SVGA, SXGA, UXGA (1600x1200), WUXGA (1920x1200)
Power Consumption		DC5.3V, 2.4W
Environment	Operating Temp.	0–50°C
	Storage Temp.	-20–60°C
	Humidity	0–80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	0.47 kg
	Dimensions (L x W x H)	20.00 x 8.27 x 2.50 cm

* The specifications and pictures are subject to change without notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 05/2014 V5.0



© Copyright 2014 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.