



**RKP-115**  
**RKP-117**  
**RKP-119**

### LCD Drawer & KVM Benefits

- ▶ Multi-user Matrix KVM with either 16 or 32 ports in 1U
- ▶ Cost efficient Combo KVM integration
- ▶ "One Man" installation slides for easy, quick installation
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Secure remote user access across the world wide web

### Drawer Features & Options

- 1U rackmount drawer with either 15", 17" or 19" LCD
- Combo interface either PS/2 or USB input to the LCD drawer
- Multiple keyboard language selections with either touchpad or trackball
- Slide rails with fixed positions to prevent drawer movement when typing
- Enhanced aesthetics with new molded front panel and two point lock

### Options

#### DVI-D



#### Audio



#### Touchscreen - USB




#### BNC + S-Video



#### DC Power



#### Touchscreen - Serial




**!** For Touchscreen integration, the height of LCD console drawer will be increased from 1U to 1.5U

### Monitor


Grade A industrial TFT LCD panel

17", 19" **SAMSUNG**  
1280 x 1024 max. resolution  
250 cd/m<sup>2</sup> brightness  
1000 : 1 contrast ratio  
160° x 160° viewing angle ( H / V )


15" **AUO**  
1024 x 768 max. resolution  
250 cd/m<sup>2</sup> brightness  
700 : 1 contrast ratio  
160° x 130° viewing angle ( H / V )

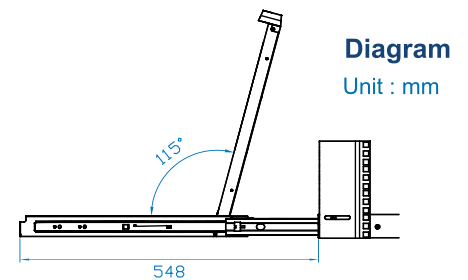


### Nb N keyboard integrated with touchpad

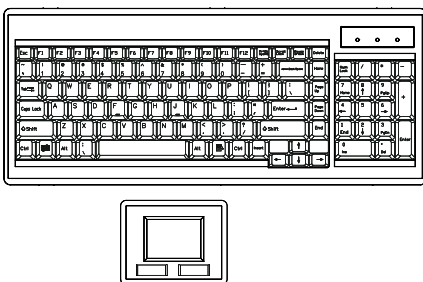

### Nb N keyboard integrated with trackball

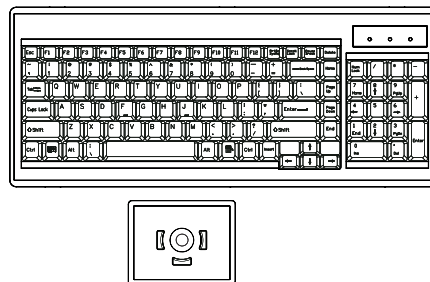

### Supporting layouts

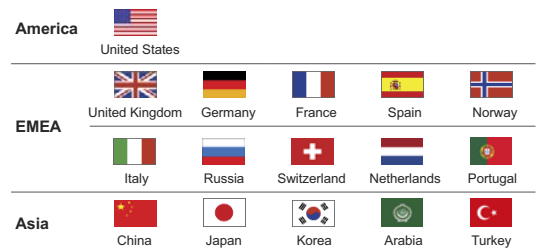

### Dimensions

Model	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
RKP-115 / RKP-117	441.6 x 650 x 44.5 mm 17.4 x 25.6 x 1.75 inch	595 x 860 x 140 mm 23.4 x 33.9 x 5.5 inch	15 kg 33 lb	19 kg 42 lb
RKP-119	441.6 x 650 x 44.5 mm 17.4 x 25.6 x 1.75 inch	595 x 860 x 140 mm 23.4 x 33.9 x 5.5 inch	15 kg 33 lb	19 kg 42 lb

**!** The weight is only for the single console models. It varies with accessories & options such as KVM, DVI-D, AV, audio, DC power & touchscreen.

## Base Model

15" LCD

17" LCD

19" LCD

<ul style="list-style-type: none"> <li>• Combo interface</li> <li>• without KVM</li> </ul>	RKP-115	RKP-117 	RKP-119
--	---------	---	---------

## KVM Integration

back



stands for the 2nd digit of 15", 17" and 19" LCD size.

5 = 15"






7 = 17"

9 = 19"

## Matrix Cat6 KVM






[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf)

Console	Local	Remote	IP	8-port	16-port	32-port
 IP	1	1	1	-	RKP11X - MUIP1613	RKP11X - MUIP3213
 IP IP	1	1	2	-	RKP11X - MUIP1624	RKP11X - MUIP3224
	1	1	0	-	RKP11X - MUIP1602	RKP11X - MUIP3202
	1	2	0	-	RKP11X - MUIP1603	RKP11X - MUIP3203
	1	3	0	-	RKP11X - MUIP1604	RKP11X - MUIP3204


## Combo Cat6 KVM








[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf)

Console	Local	Remote	IP	8-port	16-port	32-port
 IP	1	0	1	RKP11X - UIP802	RKP11X - UIP1602	RKP11X - UIP3202
	1	1	0	RKP11X - U802	RKP11X - U1602	RKP11X - U3202
	1	0	0	RKP11X - U801	RKP11X - U1601	RKP11X - U3201

## Matrix DB-15 KVM






[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf)

Console	Local	Remote	IP	8-port	16-port	32-port
 IP	1	1	1	RKP11X - MIP813	RKP11X - MIP1613	-
 IP IP	1	1	2	RKP11X - MIP824	RKP11X - MIP1624	-
	1	1	0	RKP11X - MIP802	RKP11X - MIP1602	-
	1	2	0	RKP11X - MIP803	RKP11X - MIP1603	-
	1	3	0	RKP11X - MIP804	RKP11X - MIP1604	-

## Combo DB-15 KVM



[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf)

Console	Local	Remote	IP	8-port	16-port	32-port
 IP	1	0	1	RKP11X - IP802	RKP11X - IP1602	-
	1	1	0	RKP11X - 802	RKP11X - 1602	-
	1	0	0	RKP11X - S801	RKP11X - S1601	-

## PS/2 DB-15 KVM



[www.austin-hughes.com/support/usermanual/cyberview/UM-CV-PS2KVM-KIT.pdf](http://www.austin-hughes.com/support/usermanual/cyberview/UM-CV-PS2KVM-KIT.pdf)

Console	Local	Remote	IP	4-port	8-port	16-port
	1	0	0	-	RKP11X - 801	-