


CE800


USB KVM Extender



Special security login for uploading USB files

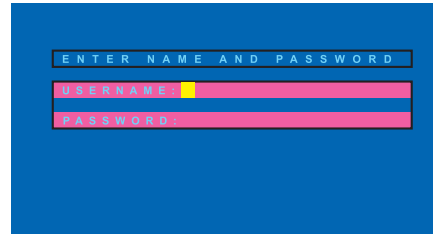

Diagram

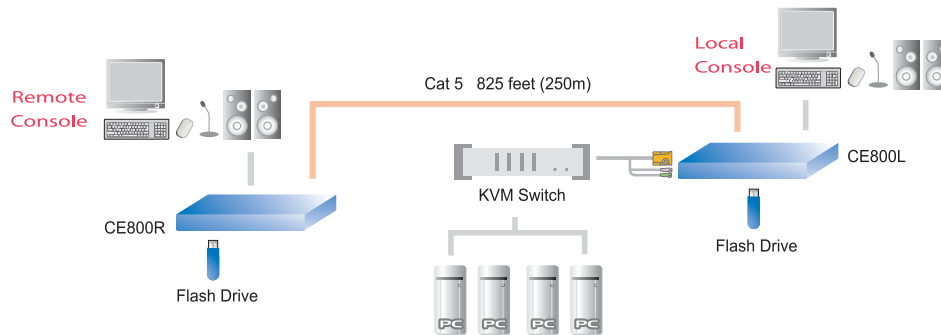

Features

- Cat 5 (or higher) cable to connect the Local and Remote Units – up to 250 m (820') apart
- Dual console operation - control your system(s) from both the local and remote consoles
- Pushbutton selection of the active console
- Built-in USB port on both units supports external USB Mass Storage compliant flash drives for easy file sharing
- Special security feature requires login when mounting an external USB storage device on the remote unit
- Supports VGA, SVGA, and Multisync monitors – local monitor supports DDC; DDC2; DDC2B
- High Resolution Video – up to 1600 x 1200 @ 60 Hz
- Built-in 8KV ESD protection and 2KV surge protection
- Adjustable gain control – manually adjusts signal strength to compensate for distance.
- Supports stereo speakers and stereo microphone
- Supports Microsoft Intellimouse and the scrolling wheel on most mice
- Upgradable firmware
- Built-in ASIC for greater reliability and compatibility

Specifications

Function	CE800L	CE800R	
Computer Connections	1	N/A	
Connectors	Console	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack (Green)
		Microphone	1 x Mini Stereo Jack (Pink)
	KVM Port	Keyboard	1 x SPHD-15 Female (Yellow)
		Mouse	N/A
		Video	N/A
		Speaker	1 x Mini Stereo Jack (Green)
		Microphone	1 x Mini Stereo Jack (Pink)
USB Port	1 x USB Type A Female (White)		
F/W Upgrade	1 x 4-conductor 3.5mm Jack(Black)	N/A	
Power	1 x DC Jack		
Unit to Unit (Link)	1 x RJ-45		
Switches	Access Select	1 x Pushbutton	
	Picture Compensation	N/A	2 x Pushbutton
LEDs	Local	1 (Green)	N/A
	Remote	1 (Green)	1 (Green)
	Link	N/A	1 (Green)
	Compensation	N/A	1 (Orange)
Power Consumption	DC 5.0V; 6.0W		
Video	1600 x 1200 @ 60Hz, 150m 1024 x 768 @ 60Hz, 250m		
Environment	Operating Temp.	0 - 50 °C	
	Storage Temp.	-20 - 60 °C	
	Humidity	0-80% RH	
Physical Properties	Housing	Metal	
	Weight	0.50 kg	0.49 kg
	Dimensions (L x W x H)	20.00 x 8.00 x 2.50 cm	

* The specifications and pictures are subject to change without notice.