


ROSE.COM

Quick Start Guide



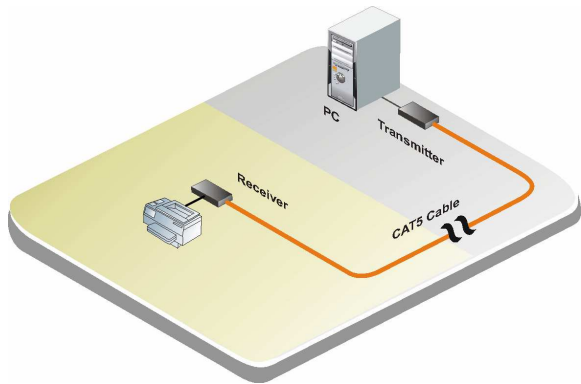

Perform the following steps to install the Crystallink CAT5 Serial Extender

- 1- Connect the Local unit's DB9F port to the corresponding Com port on your PC using the provided DB9MM cable.
- 2- Connect a compatible serial device to the Remote unit's DB9F port.
- 3- Connect the local unit to the remote unit with up to 3,300 feet (1000 meters) of UTP CAT5 cable.

If the serial transmission does not perform properly, connect the 9VDC power adapter to the power jack on the transmitter unit and re-test the transmission. If the transmission is still performing improperly, remove the power adapter from the transmitter unit and connect it to the receiver unit.

If the serial transmission is still unacceptable, contact Rose Electronics technical support.

Features

- Extend the distance of any compatible serial device up to 3,300 feet (1,000 meters) from your PC over CAT5 cable.
- Sends serial data at 230 kbps
- One CAT5 cable for serial data to the remote unit
- Conforms to RS-232c standards / wiring per 568A / 568B

Specifications

Part Number	CLK-SLDTPD9/9						
Connectors	Local RS-232 – DB9F Remote RS-232 – DB9F Link – RJ45F Power – From +9VDC power adapter						
Max data rate	230 kbps						
Cable Distance	3.300 feet (1,000 meter) Max.						
Communication mode	Full-duplex						
Power Adapter	9VDC 300mA						
Weight	Local / Remote unit – 2.3 oz / 65g						
Dimensions	<table><thead><tr><th>Width</th><th>Depth</th><th>Height</th></tr></thead><tbody><tr><td>1.33in / 34mm</td><td>3.62in / 92mm</td><td>0.87in / 22mm</td></tr></tbody></table>	Width	Depth	Height	1.33in / 34mm	3.62in / 92mm	0.87in / 22mm
Width	Depth	Height					
1.33in / 34mm	3.62in / 92mm	0.87in / 22mm					

Technical Support

If you are experiencing problems, or need assistance in setting up, configuring or operating your unit, consult the appropriate sections of this document. If, however, you require additional information or assistance, please contact the Rose Electronics Technical Support Department at:

Phone: (281) 933-7673
E-Mail: TechSupport@rose.com
Web: www.rose.com

Technical Support hours are from: 8:00 am to 6:00 pm CST (USA), Monday through Friday.

Please report any malfunctions in the operation of this Unit or any discrepancies in this document to the Rose Electronics Technical Support Department.



Server Management



Solutions

☪ **Phone: 800-333-9343** ☪ **E-mail: sales@rose.com** ☪

10707 Stancliff Rd. Houston, TX 77099

Rose Electronics – Europe: +49 2454 969442 Rose Electronics – Asia: +65 6324 2322