


# 8-Port True 4K HDMI Switch

## VS0801HB


- The ATEN VS0801HB is designed for applications that require the routing of 8 sources to one compatible display device. It supports video resolutions up to True 4K (4096 x 2160 @ 60Hz 4:4:4), data rates up to 18 Gbps, 3D, Deep Color up to 12-bit, and HD lossless audio formats. The VS0801HB features Auto Switching modes for auto port selection and Instant Switching for a smooth video transition between HDMI ports. Multiple convenient control options include front panel pushbuttons, bi-directional RS-232, IR, and auto switch, allowing for easy integration.

Engineered to meet today's demand of True 4K signal transmission and user-oriented design, the ATEN VS0801HB is a powerful solution for a wide range of settings, such as home theater, meeting rooms, trade shows, and shopping centers.

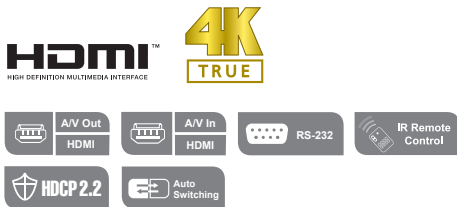

### Features

- Allows up to 8 HDMI sources to be connected to one HDMI display
- HDMI 2.0 (3D, Deep Color, 4K); HDCP 2.2 compliant
- Superior video quality - True 4K resolutions of 4K x 2K @ 60 Hz (4:4:4) and standard 1080p (1920 x 1080 @ 60 Hz)
- Built-in bi-directional RS-232 serial port for high-end system control
- Auto switching modes for auto port selection
- Instant switching between HDMI input sources
- Supports IR extension
- Clear LED indication of device status
- Plug-and-play
- Rack Mountable

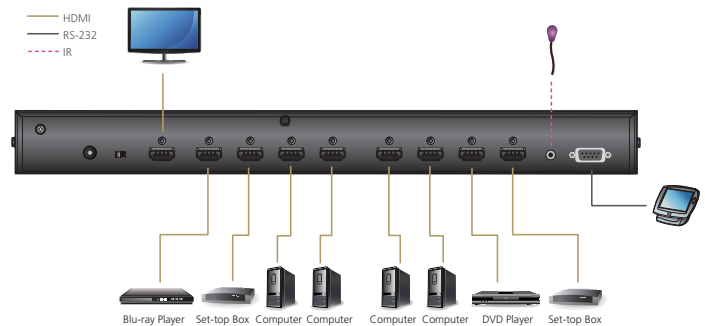

### Specifications

Function	VS0801HB
<b>Video Input</b>	
Interfaces	8 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3 m
<b>Video Output</b>	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
<b>Video</b>	
Max. Data Rate	18 Gbps (6 Gbps Per Lane)
Max. Pixel Clock	600 MHz
Compliance	HDMI 2.0 (3D, Deep Color); HDCP 2.2 Consumer Electronics Control (CEC)
Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:4:4)
Max. Distance	3 m
<b>Audio</b>	
Input	8 x HDMI Type A Female (Black)
Output	1 x HDMI Type A Female (Black)
<b>Control</b>	
RS-232	Connector: 1 x DB-9 Female (Black) <b>Baud Rate and Protocol:</b> Baud Rate: 19200, Data Bits: 8, Stop Bits: 1, Parity: No, Flow Control: No
<b>Connectors</b>	
Power	1 x DC Jack
<b>Power Consumption</b>	5 VDC, 14.84W
<b>Environmental</b>	
Operating Temperature	0° to 40° C
Storage Temperature	-20° to 60° C
Humidity	0 - 80% RH, Non-Condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	2.14 kg
Dimensions (L x W x H)	43.72 x 15.83 x 4.40 cm

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 01/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.